


PA-255 LAGGING ADHESIVE

The PA-255 is a white colored water base lagging adhesive for brush application. It is used to seal the edge of fiberglass to minimize air loss and eliminate the fiberglass particles from becoming air borne.

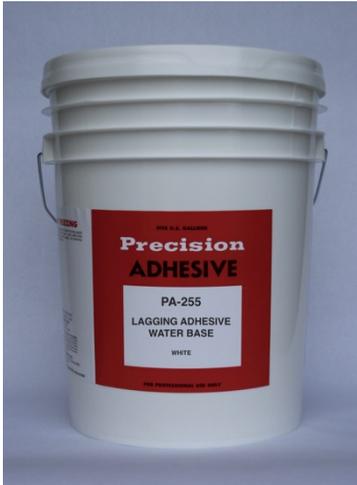

APPLICATIONS

- For all fire hazard areas.
- Seals edges of fiberglass insulation used in HVAC ducts.
- Bonding fibrous glass insulation to the exterior of sheet metal ducts in order to form a stiff edge.
- Bonding felt or other fibrous materials to metal, wood and sheet rock.

ADVANTAGES

- Safe to use in fire hazard areas.
- Dries to water resistant film.
- Good adhesion to metal, fiberglass, wood, paper or cloth.
- Non-flammable, no unpleasant fumes or odors. Safe to use in enclosed areas.
- Easy brushing, non-dripping.

PROPERTIES

Composition:	Water based adhesive ready to use. It is non-flammable
Color:	White
Viscosity:	~10,000 cp. Heavy brush
Solids:	~58%
Solvents:	Thinning – Water
	Cleanup – Wet, use warm water. For dry, use chlorinated or aromatic solvents.
Storability:	Pigment settles on standing. Stir thoroughly before each use. Keep from freezing. Stores for up to 6 months.
Service Temperature:	0 to 180°F
Application and Storage:	50 to 100°F
Weight per Gallon:	9 pounds
Application Techniques:	Apply with brush and allow to dry. Clean brush, spills and hands with soap and water.
Flammability:	Non-flammable wet

Color



Application
Methods



Not recommended for exposed outdoor use